


item number	for width of cable tray	for height of cable tray	H	thickness of metal sheet	weight kg/ps	amount of bolts for connection
NK 50X62_S	62	50	45	0,8	0,04	2
NK 50X62_F				1,0	0,05	
NK 50X125_S	125	50	45	0,8	0,06	2
NK 50X125_F				0,8	0,07	
NK 50X250_S	250	50	45	0,8	0,09	2
NK 50X250_F				0,8	0,11	
NK 100X125_S	125	100	95	0,8	0,12	4
NK 100X125_F				1,0	0,18	
NK 100X250_S	250	100	95	0,8	0,20	4
NK 100X250_F				1,0	0,29	
NK 100X500_S	500	100	95	0,8	0,44	4
NK 100X500_F				1,0	0,51	

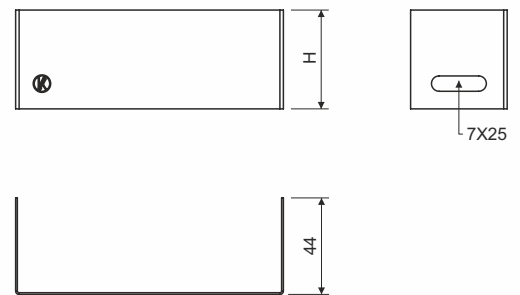

product description: The end-piece is used to cover the end of cable trays running through MARS cable trays.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm
F - Hot Dip Galvanized, zinc-layer 45 µm (min. 35 µm)

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

