

type number: **SU 60\_S, SU 60\_F**

for height of cable tray: 60 mm

thickness of metal sheet: 1,0 mm

product description: It is used for making an additional branching use an unequal T-piece or cross.

Advantage of this using is availability to choose bending tray with any width.

The reduction piece is delivered in singles, must be used 2 pieces for installation.

The connection is performed using the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm  
F - Hot Dip Galvanized, zinc-layer 50 - 100 µm

sales amount: á 1 pc


meets the requirements: EN 61537:02

classification: ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

Systems may be supplied with various surface finishes whereas the surface finish does not affect the determined maintained time of operability in fire.

storage: EN 60721-3-1

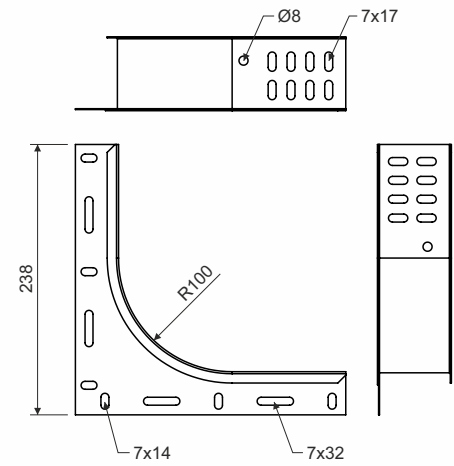

length of cut out side wall of the tray for branch	
width of cable tray	D
50	250
100	300
150	350
200	400
300	500
400	600
500	700
600	800

