
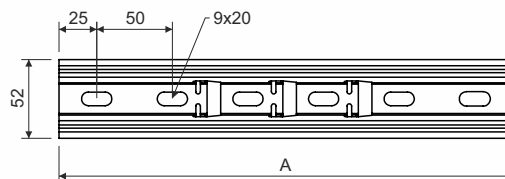


type number	A (mm)	thickness of metal sheet (mm)	max. load (kg)	w eight (kg/pc)
DZNP 100/B_S	250	1,5	250	0,24
DZNP 100/B_F				0,25
DZNP 150/B_S	300	1,5	200	0,31
DZNP 150/B_F				0,32
DZNP 200/B_S	350	2,0	294	0,37
DZNP 200/B_F				0,39
DZNP 300/B_S	450	2,0	235	0,43
DZNP 300/B_F				0,45
DZNP 400/B_S	550	2,0	161	0,55
DZNP 400/B_F				0,57
DZNP 500/B_S	650	2,0	115	0,67
DZNP 500/B_F				0,69
DZNP 600/B_S	750	2,0	87	0,79
DZNP 600/B_F				0,81



product description: The load bearing profile is designed for fastening of the wire trays from ceiling together with a 2 threaded rods \varnothing 8 mm, nuts M 8 and washers PD 8.

The wire tray is placed on the load bearing profile in the prepared cut-outs.

The load bearing profile can be used to attach the wire tray to the ceiling or wall. The load bearing profile is fixed to the base material using KPO 8X97 anchors.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 μ m
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 55 μ m (min. 45 μ m)

sales amount: á 1 pc

meets the requirements: EN 61537:02

storage: EN 60721-3-1

