


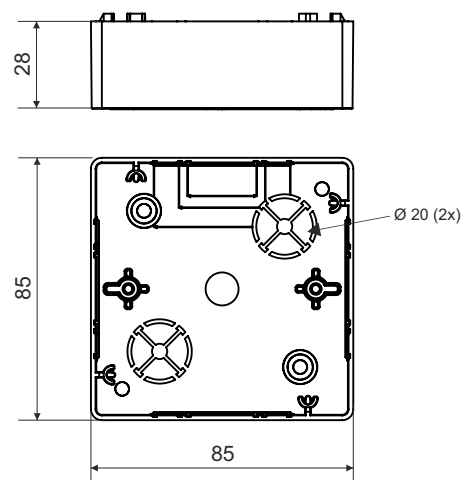

product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
intended for devices of Zoni - ABB series
suitable for devices with great mounting depth
on the sides of the box are marked inlets for the trunkings
can achieve IP 40 while used with cover VLK 85/ZNI HF

material: PC-ABS (halogen-free)

color: white

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 32 g

meets the requirements: ČSN EN IEC 60670-1 ed. 2

storage: ČSN 64 0090

LK 85X28 ZNI HF_HB- 10 pcs of boxes including device screws packed in foil; 90 pcs of boxes in carton; color - white

accessories:

screwless terminal plates TYP015, TYP016, TYP017, TYP018
cover VLK 85/ZNI HF



recycling codes:



box



foil



screws



carton

Warning:

Incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person.

Inappropriate placing - the box has an IP 40 rating and must not be installed in environments with higher protection requirements.

Product damage - if the box is visibly damaged, stop using it.

Follow the manufacturer's installation instructions according to the installation instructions, videos.

Under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers.