


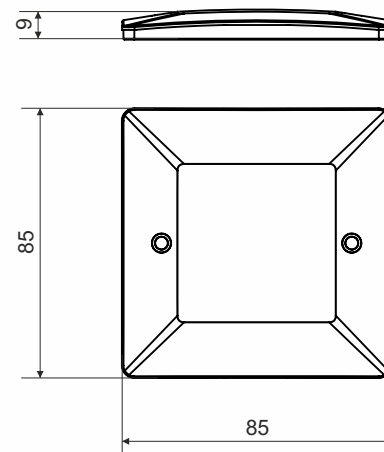

product description: to finally cover trunking boxes LK 85X28 ZNI HF

material: PC - ABS (halogen-free)

color: white

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 16 g

meets the requirements: ČSN EN IEC 60670-1 ed. 2

storage: ČSN 64 0090

VLK 85/ZNI HF_HB - 10 covers with instrumental screws packed in a foil, labeled; 330 covers packed in carton, white colour

recycling codes:



cover



foil



screws



carton

Warning:

Incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person.

Inappropriate placing - box with cover has been an IP 40 rating and must not be installed in environment with higher protection requirements.

Product damage - if the product is visibly damaged, stop using it.

Follow the manufacturer's installation instructions according to the installation instructions, videos.

Under normal and foreseeable conditions of use, the installed box with cover does not pose any risks to consumers.